



moduflex⁺

24V/6kW DC Power Core

PRODUCT DESCRIPTION

The Moduflex+ 24Vdc series is designed using Enetek's high efficiency switchmode rectifier modules and intelligent controller that incorporates with the respective load and battery distribution, incoming AC as well as surge protection. The solution can be customized according to the specific requirements.


The SMU01 controller with user-friendly design, coupled with its compact size, simple-to-operate interface is highly adaptable and provides the monitoring capabilities for managing and optimizing the system solution.

APPLICATIONS

- Macro cell BTS
- Microwave
- LTE / WiMax
- FTTX
- Broadband Access
- Optical Fibre Transmission System
- IDC (Internet Data Centres)

KEY FEATURES

- Hot-Swap Rectifier Modules
- Modular, Scalable Cabinet Design
- High Power Density
- Highly Efficient @ up to 95%
- Front-to-back Airflow
- Excellent EMC Performance
- Wide Input Voltage Range
- Wide Temperature Range
- Compliant with Global Standards

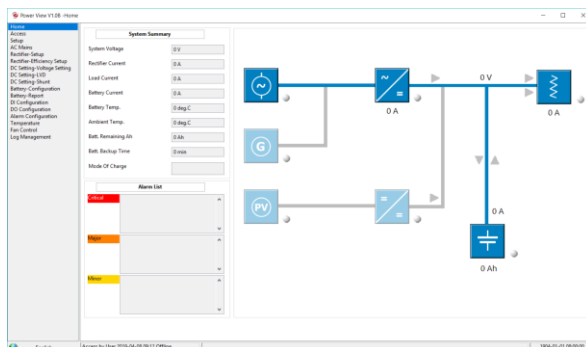

TECHNICAL SPECIFICATIONS

PART NUMBER	SPC40405.1XX
Capacity Range	6kW
INPUT SPECIFICATIONS	
Mains Input Configuration	1-Phase 230Vac
	3-Phase 230Vac (Δ)
	3-Phase 400Vac+N (Y)
Power Factor	≥ 0.99
Frequency	45Hz to 66Hz
THD	$< 5\%$ (50% to 100% load)
Input Protections	Soft Start
	Surge Protection
	Overvoltage Protection
OUTPUT SPECIFICATIONS	
Nominal Output Voltage	24.0Vdc
Output Power	6kW
Efficiency	Up to 95%
BATTERY DISTRIBUTION	
Battery Low Voltage Disconnect	BLVD @ 200A
Battery Distribution	4 x 27mm width 80A-125A 1P MCB (Configurable)
LOAD DISTRIBUTION	
Load Low Voltage Disconnect	LLVD is optional
Load Distribution	12 x 18mm width 6A-63A 1P MCB (Configurable)
CONTROLLER and RECTIFIER TYPE	
Rectifier Module	ETR ⁺ 1524 range of rectifier modules
Controller Module	SMU01 (refer to datasheet)
ENVIRONMENTAL	
Operating Temperature Range	-20°C to +75°C (de-rates above 55°C)
Storage Temperature Range	-40°C to +85°C
Relative Humidity	Operating: 5% to 90% RH non-condensing
	Storage: 0% to 99% RH non-condensing
Acoustic Noise	$\leq 58\text{dB}$ @ full load, 40°C
PHYSICAL	
Dimensions WxDxH (mm)	482 x 390 x 222 (5U)
Net Weight	~15kg (excluding rectifier modules)
DESIGN STANDARDS	
Electrical Safety	EN/IEC62368-1
EMC	ETSI EN 300 386 V1.6.1