

Portable Box

Portable charging station design is more aesthetically pleasing, with a large color screen display, ultra small size, power capacity of 3.5~11kW, 8 safety protection measures, protection level IP66, and resistance to dirt and corrosion.



Exquisite Design

- Compact size, portable
- Household plug, plug & play
- Cable winding design, easy storage

Safety Protection

- RCD (Type A + DC6mA)
- 8 safety protection measures
- IP66 protection rating (body)


Status Display

- 2.4-inch color screen
- Charging status display
- LED indicator light.

Specifications



MODEL	EMAC3.5P-EU	EMAC7P-EU	EMAC11P-EU
Outlet Options	AC Type 2 (IEC 62196-2)		
Input/Output CHARACTERISTICS			
Input/Output Current rating	16A	32A	16A
Input/Output Power rating	3.5kW	7kW	11kW
Input/ouput voltage	230VAC		400VAC
Input Frequency	50Hz		
Cable Length	5.0 m or Customized		
Distribution Systems	TT, TN system		
Connector Type	1P + N + PE		3P + N + PE
Protection	Overcurrent, overvoltage, undervoltage, ground fault, integrated surge protection, RCD (TypeA+DC6mA), Over-temperature protection		
Energy Measure	NO		
GENERAL CHARACTERISTICS			
Protection Rating	IP66		
Housing Material	PC (UL94-V0)		
Operating Altitude	≤ 2000m		
Operating Temperature	-25 °C to +50 °C		
Storage Temperature	-30 °C to +80 °C		
Humidity	< 95%, non-condensing		
Mounting	Wall-mount		
Dimension (mm)	60*104*243mm		
Net Weight (kg)	≤1.65kg	≤2.3kg	≤2.4kg
COMPLIANCE STANDARDS			
Codes & Standards	IEC61851-21-2, EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, EN 61000-3-11, EN 61000-3-12, IEC61008-1, IEC61008-2-1, EN 62423, IEC 62196-1, IEC 62196-2		
Safety Standards	IEC/EN 61851-1, EN 62311, EN 62479, IEC/EN 62955		

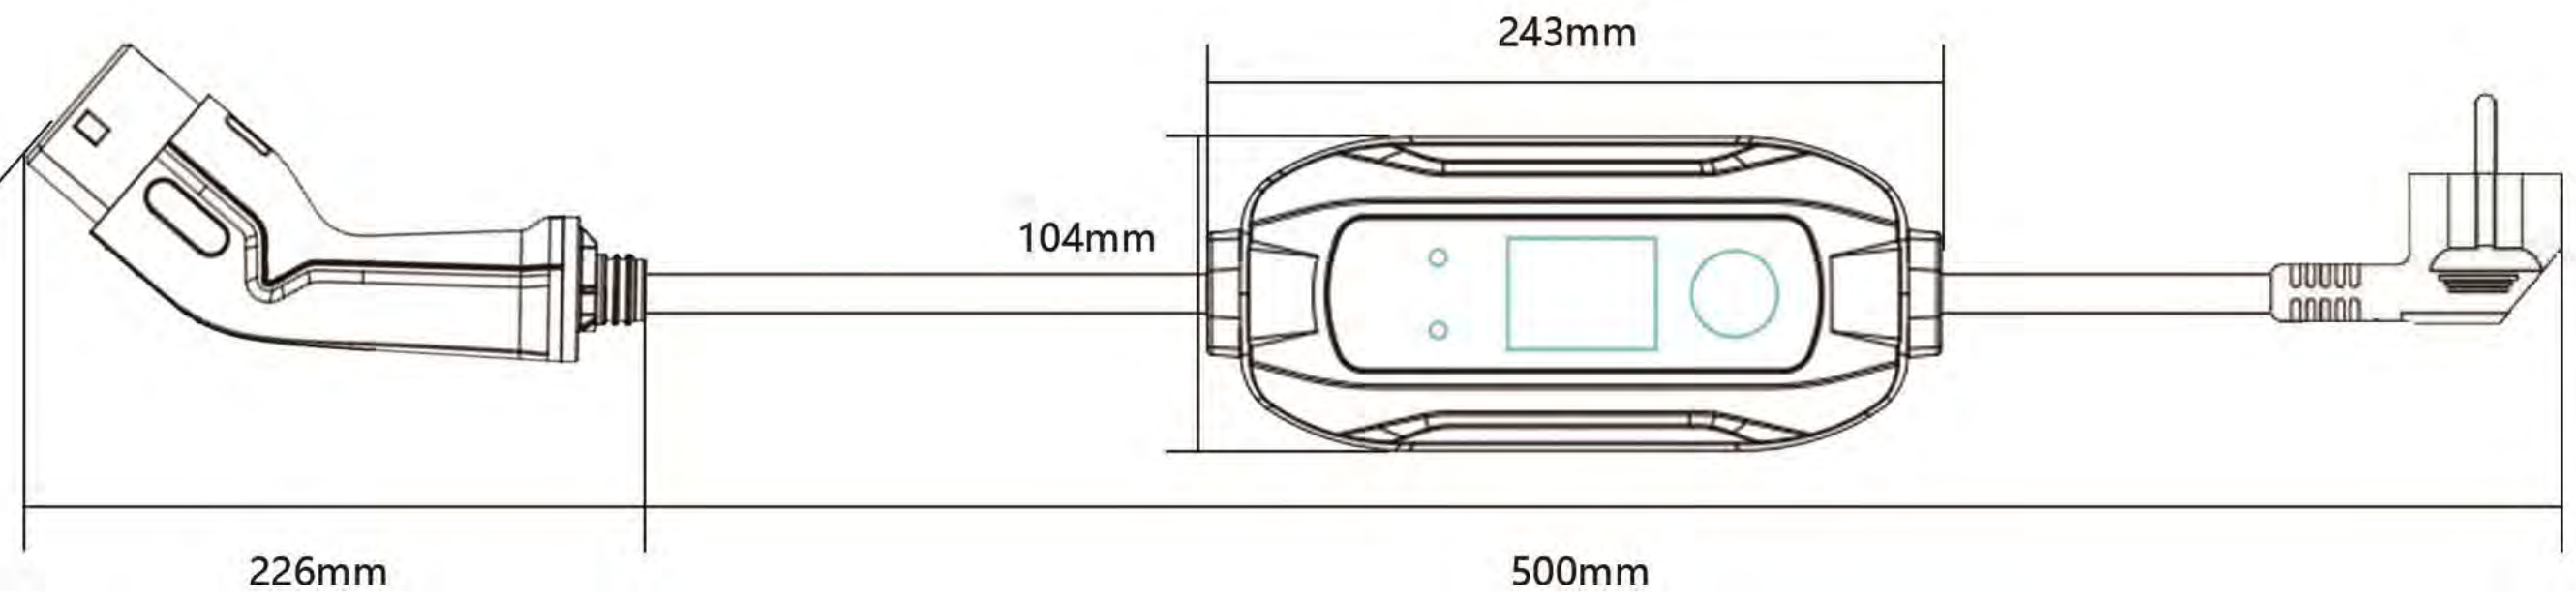

Metrobit FZCO

Warehouse No. FZS5AA05, South Zone 5, Jebel Ali Free Zone, Dubai, UAE

TEL:+971 4 8809093 FAX:+971 4 8807076

✉ info@metrobitcorp.com
🌐 www.metrobitcorp.com

